

09-26-01

IC20 Rec'd PCT/PTO SEP 25

FORM 1-1390 (Modified)  
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

## TRANSMITTAL LETTER TO THE UNITED STATES

522-1760

SEP 25 2000

DESIGNATED/ELECTED OFFICE (DO/EO/US)

U.S. APPLICATION NO. IF KNOWN SEE 37

09/937635

CONCERNING A FILING UNDER 35 U.S.C. 371

INTERNATIONAL APPLICATION NO.

PCT/EP00/02646

INTERNATIONAL FILING DATE

March 25, 2000

PRIORITY DATE CLAIMED

March 26, 1999

## TITLE OF INVENTION

Folded Honeycomb Structure Consisting Of Corrugated Paperboard And Method And Device For Producing The Same

APPLICANT(S) FOR DO/EO/US

Jochen Pflug and Ignace Verpoest

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1)
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2))
7. ☐ A copy of the International Search Report (PCT/ISA/210)
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made
9. ☒ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3))
10. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409)
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment
17. ☐ A substitute specification
18. ☐ A change of power of attorney and/or address letter
19. ☐ Certificate of Mailing by Express Mail
20. ☐ Other items or information.

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 1.5) <div style="font-size: 24pt; font-weight: bold;">09/937635</div>	INTERNATIONAL APPLICATION NO. <div style="font-weight: bold;">PCT/EP00/02646</div>	ATTORNEY'S DOCKET NUMBER <div style="font-weight: bold;">522-1760</div>
---	---	--

21. The following fees are submitted: <b>BASIC NATIONAL FEE ( 37 CFR 1.492 (a) (1) - (5) ) :</b> <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO . . . . . \$1,000.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO . . . . . \$860.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO . . . . . \$710.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) . . . . . \$690.00 <input type="checkbox"/> International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) . . . . . \$100.00 <div style="text-align: right; font-weight: bold;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS PTO USE ONLY	
				\$860.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (e))				\$0.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	24 - 20 =	4	x \$18.00	\$72.00	
Independent claims	4 - 3 =	1	x \$80.00	\$80.00	
Multiple Dependent Claims (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$1,012.00	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable). <input type="checkbox"/>				\$0.00	
SUBTOTAL =				\$1,012.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).				\$0.00	
TOTAL NATIONAL FEE =				\$1,012.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable). <input type="checkbox"/>				\$0.00	
TOTAL FEES ENCLOSED =				\$1,012.00	
				Amount to be: refunded	\$
				charged	\$

- ☒ A check in the amount of **\$1,012.00** to cover the above fees is enclosed.
- ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed
- ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. **12-0913** A duplicate copy of this sheet is enclosed

**NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.**

SEND ALL CORRESPONDENCE TO:

William M. Lee, Jr.  
 LEE, MANN, SMITH, MC WILLIAMS, SWEENEY & OHLSON  
 The Rookery Building  
 209 South LaSalle Street, Suite 410  
 Chicago, IL 60604-1202

SIGNATURE

William M. Lee, Jr.

NAME

26,935

REGISTRATION NUMBER

September 25, 2001

DATE

09/937635

JC09 Rec'd PCT/PTO 25 SEP 2001

522-1760

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

IN RE THE APPLICATION OF	)
	) Examiner:
Jochen Pflug	)
Ignace Verpoest	)
	) Group Art Unit No.
SERIAL NO.: To Be Assigned	)
	)
FILED: Herewith	)
	)
FOR: Folded Honeycomb Structure Consisting	)
Of Corrugated Paperboard and Method	)
And Device For Producing The Same	)

**AMENDMENT ACCOMPANYING APPLICATION**

Honorable Director of  
Patents and Trademarks  
Washington, D.C. 20231

Dear Sir:

The present application is the national filing of International Application No. PCT/EP00/02646. Submitted herewith is a translation of the application, having appended thereto the claim as amended and attached to the International Preliminary Examination Report. Before calculation of the national filing fee for the United States, it is requested that the application be amended as follows:

**In the claims**

Cancel claims 1 through 24 without prejudice, and substitute respective new claims 25 through 48 as follows:

25. A folded honeycomb, comprising a large number of corrugated core strips which lie beside one another and in one plane and each consist of a corrugated or trapezoidal core with at least one cover layer, the cover layers of the corrugated

core strips being arranged parallel to one another and transversely with respect to the plane, and the longitudinal direction of the flutes of the corrugated core extending, for each corrugated core strip, transversely with respect to the latter, and the corrugated core strips being connected to one another, wherein for at least each second corrugated core strip, a cover layer of one corrugated core strip is formed in one piece with the cover layer of one of the adjacent corrugated core strips and is connected to the latter via a fold of  $180^\circ$ , and the connections between adjacent corrugated core strips are arranged alternately on one side and the other side of the folded honeycomb.

26. The folded honeycomb according to claim 25, wherein the ratio between the width and the height of each corrugated core strip lies in the range from 0.5 to 2.

27. The folded honeycomb according to claim 25, wherein the ratio between the weights per unit area of the corrugated core material and the cover layer material of each corrugated core strip lies in the range from 1 to 2.

28. The folded honeycomb according to claim 25, wherein the cover layer of the corrugated or trapezoidal core of at least each second corrugated strip is wholly or partly connected over the entire area to the cover layer of the corrugated or trapezoidal core of at least one adjacent corrugated core strip.

29. The folded honeycomb according to claim 25, wherein each corrugated core strip consists of two cover layers and a corrugated or trapezoidal core arranged between them, and the one cover layer of each corrugated core strip is formed in one piece with a cover layer of an adjacent corrugated core strip and is connected to the latter via a fold of  $180^\circ$ , and the other cover layer is formed in one piece with a cover layer of another adjacent corrugated core strip and is connected to the latter via a fold of  $180^\circ$ .

30. The folded honeycomb according to claim 25, wherein a cover layer is arranged at least on one side of the large number of corrugated core strips lying beside one another.

31. A process for the continuous production of a folded honeycomb, comprising the following steps:

a) forming connected corrugated core strips consisting of a corrugated or a trapezoidal core with at least one cover layer, the corrugated core strips being connected to one another and, for at least each second corrugated core strip, the cover layer of one corrugated core strip being connected to the cover layer of an adjacent corrugated core strip; and

b) rotating the connected corrugated core strips through about  $90^\circ$  in relation to one another, as a result of which the cover layers of the corrugated core strips are folded through about  $180^\circ$  at the connecting lines.

32. The process according to claim 31, wherein the ratio between the width and the height of each corrugated core strip lies in the range from 0.5 to 2.

33. The process according to claim 31, wherein the ratio between the weights per unit area of the corrugated core material and the cover layer material of each corrugated core strip lies in the range from 1 to 2.

34. The process according to claim 31, wherein touching surfaces are firmly connected to one another, either with adhesive which is applied previously or in another way.

35. The process according to claim 31, wherein at least one cover sheet is laminated onto the folded honeycomb.

36. The process according to claim 31, wherein the step of forming the connected corrugated core strips includes cutting completely through the corrugated core web to form individual corrugated core strips.

37. The process according to claim 31, wherein the step of forming the connected corrugated core strips includes the longitudinal slitting of a corrugated core web to form connected corrugated core strips.

38. A system for producing a folded honeycomb, comprising:

a) a first apparatus for forming connected corrugated core strips consisting of a corrugated or a trapezoidal core with at least one cover layer, the corrugated core strips being connected to one another and, in at least each second corrugated core strip a cover layer of one corrugated core strip being connected to the cover layer of one of the adjacent corrugated core strips; and

b) a second apparatus for rotating the connected corrugated core strips through about  $90^\circ$  with respect to one another, as a result of which the cover layers are folded through about  $180^\circ$  at the connecting lines.

39. The apparatus according to claim 38, wherein the apparatus for forming the connected corrugated core strips includes an apparatus for cutting completely through a corrugated core web to form individual corrugated core strips.

40. The apparatus according to claim 38, wherein the apparatus for forming the connected corrugated core strips includes an apparatus for the longitudinal slitting of a corrugated core web to form connected corrugated core strips.

41. The apparatus according to claim 38, wherein the ratio between the width and the height of each corrugated core strip lies in the range from 0.5 to 2.

42. The apparatus according to claim 38, wherein the ratio between the weights per unit area of the corrugated core material and the cover layer material of each corrugated core strip lies in the range from 1 to 2.

43. The apparatus according to claim 40, wherein the apparatus for the longitudinal slitting of the corrugated core web has a plurality of rotating or stationary knives.

44. The apparatus according to claim 38, wherein the rotation apparatus has a longitudinal undulation and, as a result, leads the corrugated core strips out of the plane for some time or leads them in such a way that individual corrugated core strips or a plurality of corrugated core strips are rotated one after another.

45. The apparatus according to claim 38, wherein an apparatus for applying adhesive to the cover layers of the corrugated core strips is located upstream or in the region of the rotation of the corrugated core strips.

46. The apparatus according to claim 40, wherein the apparatus for cutting and for rotation in each case has adjusting devices for the variable setting of the distance of the knives and guide elements in the width direction.

47. A plurality of corrugated core strips which lie one beside the other, are connected to each other and lie in one plane and which each consist of a corrugated or a trapezoidal core with at least one cover layer, the cover layers of the corrugated core strips being parallel to one another and the longitudinal direction of the flutes of the corrugated core, for each corrugated core strip extending transversely with respect to the latter, and the corrugated core strips being connected to one another, wherein for at least each second corrugated core strip, the cover layer of one corrugated core strip is formed in one piece with the cover layer of one of the adjacent corrugated core strips and can be connected to the latter by being folded through 180° to form a folded honeycomb, so that the connections between adjacent corrugated core strips are arranged alternately on one side and the other side of the folded honeycomb.

48. The plurality according to claim 47, wherein the ratio between the width and the height of each corrugated core strip lies in the range from 0.5 to 2.

**REMARKS**


The above amendments are being made in order to eliminate multiple dependency and improper multiple dependency from the application. Should any multiple dependency remain, that is unintended, and the Patent and Trademark Office is requested to cancel any remaining multiple dependent claims without prejudice before calculation of the national filing fee for the United States.

The claims are identical to the claims considered in the International Preliminary Examination Report, except that multiple dependency has been removed. The International Preliminary Examination Report reaches the conclusion that the claims meet the requirements of novelty and inventive step (non-obviousness), and it is submitted that the same result should occur in the United States.

Examination of the application on its merits is awaited.

September 25, 2001

Respectfully submitted,

  
\_\_\_\_\_  
William M. Lee, Jr.  
Registration No. 26,935

Lee, Mann, Smith, McWilliams,  
Sweeney & Ohlson  
P.O. Box 2786  
Chicago, Illinois 60690-2786  
(312) 368-6620  
(312) 368-0034 (fax)



7/PATS

09/937635

WO 00/58080

1/23

PCT/EP00/02646

JCO9 Rec'd PCT/PTO 25 SEP 2001

Folded honeycomb made of corrugated cardboard, process  
and apparatus for its production

5 The invention relates to honeycomb core layers such as  
are used in sandwich materials for packaging and  
structural applications, as well as to processes and  
apparatus for producing these honeycomb cores.

10 In the aerospace industry, honeycomb cores have  
preferably been used for many decades as core material  
for sandwich panels and boards that are resistant to  
buckling and bending. These honeycomb cores, which are  
mostly hexagonal or over-expanded, consist  
15 predominantly of aluminum or phenolic-resin impregnated  
aramide fiber paper and are usually produced in the  
expansion process. A sandwich structure having two,  
usually adhesively bonded cover layers provides  
extremely high stiffness/weight and strength/weight  
20 ratios. The interest expressed by other large branches  
of industry in lightweight sandwich core materials with  
good weight-specific material characteristics is  
continually growing, so that in the meantime more than  
half the honeycomb core materials are being used in  
other sectors.

25 The use of honeycombs for packaging, in automobile and  
comparable markets requires fast and continuous  
production of the honeycomb core layer, in order that a  
product which is competitive with corrugated board and  
30 other inexpensive materials can be produced.

A sandwich with a honeycomb core has high specific  
compressive strengths in the material plane, because of  
the optimum, virtually orientation independent, support  
35 of the covering layers. As compared with a sandwich  
with a corrugated core (for example corrugated  
cardboard), better edge compression resistances and

flexural rigidity values can be achieved, in particular in the machine direction. As a result, significant savings in weight and material are possible. The pressure characteristics are also considerably better at right angles to the plane of the material because of the perpendicular, mutually supporting cell walls. In addition, a sandwich with a honeycomb core has a better surface quality, which is important in particular for printing packaging materials. Because of these advantages and the increase in demand for inexpensive sandwich cores, numerous efforts have been taken in the past to reduce the high production costs of honeycomb cores.

Many processes are known in which individual material strips or a continuous material web is adhesively bonded at alternating locations and then expanded (US 4,500,380 Bova, DE 196 09 309 Hering, US 4,992,132 Schmidlin, US 5,334,276 Meier). Such processes are already used for the partially automated production of paper honeycombs with cell sizes above about 10 mm for internal packaging, edge and corner elements and also for pallets. The necessary forces and the material stresses during expansion place high requirements on the adhesive and the adhesive bonding of the cell walls. By means of pre-embossing the fold lines, these forces can certainly be reduced but the regularity of the honeycomb geometry suffers from the expansion process, in particular in the case of paper honeycombs with small cell sizes. The internal stresses and the necessary expansion forces are increased considerably in the case of smaller cell sizes. For this reason, these processes are increasingly problematic for smaller cell sizes and more difficult to automate. In addition, the production speed is limited by the required cross-cutting of the web.

Likewise, many processes are known in which individual, corrugated or trapezoidal material webs or strips are adhesively bonded in an offset manner (US 3,887,418 Jurisich, US 5,217,556 Fell, US 5,399,221 Casella, 5 US 5,324,465 Duffy). Technical implementation to obtain a continuous process with a high production speed is difficult in the case of these processes, because of the necessary positioning and handling of the individual material webs.

10

Furthermore, processes are known in which corrugated cardboard is processed to form honeycomb cores. In one process, corrugated cardboard is used in the cell walls of honeycomb cores (US 4,948,445 Hess). In this case, 15 individual sheets of corrugated cardboard with flutes running in the production direction are supplied and short cross-cuts going through the entire thickness of the corrugated cardboard are introduced. Therefore, following folding in the production direction and 20 expansion, corrugated cores with relatively large cell sizes and relatively thick cell walls are produced. The process is principally the same as the expansion process with a continuous material web.

25 Furthermore, honeycombs and processes are known in which a corrugated cardboard web (US 3,912,573 Kunz) or an individual corrugated web (WO 91/00803 Kunz) with the flutes transverse to the production direction is cut into strips. After the web has been cut up, a 30 honeycomb core layer is then produced by bonding the individual strips adhesively to one another. This process requires a certain size of the individual strips or special positioning tapes, in order that their handling is still ensured. Because of the size of 35 the strips, the web width is reduced considerably following the rotation of the strips. In order not to obtain too small a width of the honeycomb core layer,

- the strips are cut off in a further production step and adhesively bonded to form a honeycomb block, which is then conveyed considerably more slowly transversely to the production direction. For small honeycomb heights, this honeycomb block has to be cut up, if appropriate. The honeycombs produced by such a process also have individual straight strips between individual corrugated or trapezoidally shaped cell wall strips. Such reinforced honeycombs are also known from manual production via a block (WO 95/10412 Darfler). There, the individual flat layers are placed between the individual corrugated layers and adhesively bonded to them.
- Honeycombs and processes for their production are also known in which a continuous material web, following the introduction of cuts, is initially corrugated or formed trapezoidally before the connected cell walls are folded against one another and adhesively bonded (WO 97/03816 Pflug). In order to achieve a saving in material in packaging applications, in particular as compared with corrugated cardboard, a very lightweight paper ( $40 \text{ g/m}^2$  to  $80 \text{ g/m}^2$ ) is to be preferred. When corrugating these low grammages, it is advantageous to stabilize the flute immediately after it has been formed by bonding it onto a web. In particular, in the case of corrugation transversely to the production direction, as is common in the production of corrugated cardboard at speeds up to  $350 \text{ m/min}$ , a covering layer (a liner, as it is known) has to be bonded on immediately. The corrugated web on its own cannot absorb the tensile stress necessary for the rapid conveyance of the material web.
- Furthermore, processes and apparatus are known for introducing slits into corrugated cardboards (US 5,690,601 Cummings). These slits are made along the

flutes of individual sheets of corrugated cardboard (in the transverse direction to the actual production direction of the corrugated cardboard) in order to permit a defined folding. In this process, folding is  
5 carried out towards the cut so that the latter is closed.

The invention is based on the object of specifying a honeycomb core layer, a process and an apparatus which  
10 permit the continuous production of honeycombs with relatively small cell sizes at a production speed comparable with the production of corrugated cardboard. In addition, good surface quality as well as reliable and quick attachment of the covering layers is desired.

15 The object set is achieved on the basis of the measures of claims 1, 7 and 14 and with the aid of the intermediate product as claimed in claim 23, and developed further by further features of the subclaims.

20 In the invention, a corrugated or trapezoidal material web having at least one, but preferably having two, covering layers is supplied. This can be corrugated cardboard or else a plastic fibre composite or metal  
25 corrugated core board. In addition, a web having a plurality of corrugated cores, for example a double-flute corrugated cardboard (BC flute, AA flute) can be used. The cover layers preferably also consist of very thin material (weight per unit area between 60 g/m<sup>2</sup> and  
30 100 g/m<sup>2</sup>) and the corrugated core layer consists of material up to twice the thickness since the covering layers in the preferred variant of the folded honeycomb are laid doubled. In this case, very low demands are placed on the quality of the cover layers, and also on  
35 the thickness tolerance and surface quality of the corrugated core web, since these factors have little influence on the surface quality of the end product.

The thickness of the corrugated cardboard web determines the size of the honeycomb cells. In order to support the cover layers, cell sizes of 4.7 mm (A flute) or, at very low weights per unit area, 3.6 mm (C flute) are adequate since the flat corrugated core cover layer strips provide an additional support and reduce the risk of dimpling of the cover layers in the cells. However, corrugated cores with smaller and larger cell sizes can also be produced from corrugated core webs with smaller and larger heights of the flute (e.g. K flute).

According to one embodiment of the invention, the multi-layer web is firstly provided in the conveying direction with a large number of continuous fold lines on the underside and the upper side. The fold lines can be introduced, for example, by means of pressing or longitudinal cutting of the web. The cuts do not quite cut through the web in the thickness direction but in each case leave a continuous cover layer (or the cover layer and the peaks of the flutes). The cuts on the upper side are in this case located as accurately as possible halfway between the cuts on the underside. The irregularities in the cover layers, which are normal in corrugated cardboard, and the different cutting forces between the peaks of the flutes can lead to the cover layer being partly or wholly cut through at individual points. This is entirely desirable, provided that the corrugated core strips still remain connected in the transverse direction. The necessary folding force can be reduced by this slight cutting or perforation of the cover layers or an additional pre-embossing of the fold lines. The corrugated core strips can also first be completely cut through and, at the same time or immediately thereafter, adhesively bonded together by means of adhesive foils. This material may be easier to

- bend and to fold, as compared with the material of the web. Therefore, the combination of words "formed in one piece" not only includes corrugated strips which are connected to one another by a cover layer, but also
- 5 separate corrugated strips which are connected to one another by adhesive foil. The ratio between the width and the height of the connected corrugated core strips is preferably in the range from 0.5 to 2.0.
- 10 The connected corrugated core strips are then in each case rotated through  $90^\circ$  in such a way that the cuts open and the connected cover layers of adjacent strips are folded through  $180^\circ$ . Since the strips are connected, no alignment in the thickness or
- 15 longitudinal direction is necessary. The strips lie planar next to each other with the connected cover layers and form the folded honeycomb. They can be adhesively bonded, joined in any other way or joined by the new cover layers only when the latter are bonded
- 20 on. The application of the adhesive can then be carried out by means of rollers, nozzles or brushes, an application which constantly applies a relatively low amount of adhesive being preferred. When use is made of a corrugated core web having two cover layers, the
- 25 corrugated core strips are significantly more stable than only with one cover layer, and can be adhesively bonded with some pressure. Possible deformations of the corrugated core, which often impair the surface quality in the production of corrugated cardboards, takes place
- 30 here in the width direction and has no influence on the surface quality and thickness tolerance of the folded honeycomb.

The flat corrugated core cover layer strips, which are

35 vertical in the honeycomb, are able to accommodate the tensile stresses in the production direction and permit a fast transport of the material web. They subsequently

increase the shear and compression characteristics of the honeycomb, so that all the material of the corrugated cardboard is utilized in the honeycomb core folded from it.

5

In order to produce a honeycomb board material, new covering layers can be adhesively bonded continuously onto the honeycomb core layer immediately after the honeycomb production. In this case, the high  
10 compressive strength of the honeycomb is very useful. Good attachment of the cover layers to the honeycomb can be achieved by slight defibering of the edges during the introduction of the longitudinal cuts. In addition to the edges of the corrugated core layer, the  
15 small side faces of the folded corrugated core cover layer strips are additionally available for the attachment of the cover layers.

An embodiment of the honeycomb core layer, the process  
20 and the apparatus is described by using the drawings, in which

Figure 1 shows the corrugated core web and the position of the longitudinal slits in plan  
25 view and side view,

Figure 2 shows the position of the longitudinal slits in the corrugated core web in front view,

30 Figure 3 shows the slightly folded coherent corrugated core strips,

Figure 4 shows the connected corrugated core strips folded through 30°,  
35

Figure 5 shows the connected corrugated core strips folded through 60°,



Figure 6 shows the almost completely folded coherent corrugated core strips,

5 Figure 7 shows a perspective illustration of the slightly folded corrugated core web,

Figure 8 shows a perspective illustration of the corrugated core web folded through  $30^\circ$ ,

10

Figure 9 shows a perspective illustration of the corrugated core web folded through  $60^\circ$ ,

15

Figure 10 shows a perspective illustration of the almost completely folded honeycomb of corrugated cardboard,

20

Figure 11 shows the process for producing the folded honeycomb from corrugated cardboard in plan view,

25

Figure 12 shows a perspective illustration of the process for producing the folded honeycomb from corrugated cardboard,

30

Figure 13 shows the leading of the material web out of the plane of the web in side view,

Figure 14 shows the still flat corrugated core web in front view,

35

Figure 15 shows the deformation out of the plane of the web in a corrugated core web folded through  $5^\circ$ ,

Figure 16 shows the deformation out of the plane of the web in a corrugated core web folded through 45°,

- 5 Figure 17 shows the deformation out of the plane of the web in the case of three-stage rotation of each third corrugated core strip,

10 Figure 18 shows the apparatus for introducing the longitudinal slits for producing the folded honeycomb in front view,

15 Figure 19 shows the apparatus for the variable introduction of the longitudinal slits in front view,

20 Figure 20 shows a section of the apparatus for rotating and folding together the connected corrugated core strips to produce the folded honeycomb from corrugated cardboard,

Figure 21 shows a section of the apparatus for the variable rotation and folding together of the connected corrugated core strips.

25

Figure 1 shows the supplied corrugated core web with the flutes transverse to the production direction, and the position of the longitudinal slits in plan view and side view. The corrugated core web can be based on plastic, fabric, fibre composite material, paper, paperboard or similar materials. The corrugated core strips 1 are each bounded by two slits 2 and 3. By means of these cuts, which do not quite cut through the material web in the thickness direction, the corrugated core web is alternately cut into from above and below. The remaining material (a cover layer and/or the peaks of the flutes of the corrugated core) are later folded

30

35

at this point around the fold lines 4 and 5. Figure 2 shows the position of the longitudinal slits and the fold lines in front view. The ratio between the width and the height of each corrugated core strip is preferably in the range from 0.5 to 2.

Figures 3 to 6 show the folding of the connected corrugated core strips step by step in front view. An adhesive 6 for packaging purposes, preferably based on starch or PVA, can be applied to the corrugated core cover layer strips before they are folded. The adhesive can be applied to the entire surface or only at the point where the peaks of the flutes or valleys of the flutes meet the adjacent corrugated core strips. Figures 7 to 10 show the same intermediate production steps in a perspective illustration.

Figure 11 shows the process for producing the folded honeycomb from corrugated cardboard in plan view. The positions of the individual process steps are shown in Figure 12. Firstly, at position 10, the longitudinal slits are introduced into the material web. Then, from 11 to 13, the material strips are rotated. Here, an adhesive can optionally be introduced first during the rotation (for example at 12). At 14, covering layers can then be applied to the folded honeycomb.

In the continuous process, torsional stresses result from the rotation of the connected corrugated core strips. These stresses are relatively low, because of the low torsional rigidity of the thin, narrow strips. The length of this process step can therefore be relatively short ( $< 0.5$  m), if there is no change in the web width. The ratio between the thickness of the corrugated core web and the thickness of the honeycomb core layer necessarily corresponds to the ratio between

the widths of the two material webs ( $b_{\text{honeycomb}} = b_{\text{corrugation}} \cdot t_{\text{honeycomb}}/t_{\text{corrugation}}$ ).

5 The corrugated core thickness ( $t_{\text{corrugation}}$ ) should preferably be selected to be equal to the honeycomb core thickness ( $t_{\text{honeycomb}}$ ), in order that a constant machine width results ( $b_{\text{honeycomb}} = b_{\text{corrugation}}$ ). However, during the rotation of the material strips, a maximum width of the web is in any case reached with  
10  $b_{\text{max}} = b_{\text{corrugated}} \cdot \sqrt{(t_{\text{corrugated}}^2 + t_{\text{honeycomb}}^2)} / t_{\text{honeycomb}}$ . With the same material thickness  $t_{\text{corrugation}} = t_{\text{honeycomb}}$ , the width change would be  $b_{\text{max}} = 1.41 \cdot b_{\text{corrugation}}$ . This change in the web width can be prevented by guiding the material strips briefly out of the plane of the web.

15 Figure 13 shows the guidance of the material web out of the plane of the web in side view. The connected corrugated core strips can be bent slightly during the 90° twist. However, bending the twisted corrugated core  
20 strips requires a greater length of the twisting region. It is therefore expedient to make the web slightly wavy over the width in order in this way to limit the deformations from the plane of the web. Figures 14 to 16 show the individual steps during a  
25 possible deformation of the connected corrugated core strips out of the plane of the web in order to avoid the change in web width.

In addition, the change in width can be reduced  
30 considerably if the corrugated core strips are rotated one after another. In this case, it is particularly advantageous to rotate first of all each third corrugated core strip first. In this way, all the corrugated core strips can be rotated in three stages  
35 without any noticeable change in width resulting. Figure 17 shows the three-stage rotation of each third corrugated core strip and the resulting slight

deformations out of the plane of the web, in individual front views. Individual corrugated core strips or a number of corrugated core strips can also be rotated one after another in a different sequence in order to  
5 limit the change in width.

Nevertheless, a reduction in the web width during the production of honeycomb core layers with a greater thickness ( $t_{\text{honeycomb}} > t_{\text{corrugation}}$ ) and an increase in the web  
10 width during the production of smaller thicknesses ( $t_{\text{honeycomb}} < t_{\text{corrugation}}$ ) may possibly be advantageous up to a certain extent, for reasons concerning the flexibility of the system. The ratio between the thickness of the corrugated core web ( $t_{\text{corrugation}}$ ) and the thickness of the  
15 honeycomb core layer ( $t_{\text{honeycomb}}$ ) is in this case preferably between 0.5 and 2. Figure 18 shows an apparatus for introducing the longitudinal slits. This apparatus can comprise simple longitudinal cutting knives 20, which rotate on an upper 21 and a lower  
20 shaft 22 or on a large number of separate shafts. The distance between the upper and lower cutting knives in relation to one another and among each other should be as uniform as possible, in order to achieve a high cutting accuracy and therefore a very constant  
25 honeycomb core thickness. In addition, the material web should be guided as exactly as possible (for example by means of rolls) in order that an exact depth of the slits is achieved. The rapid exact cutting of corrugated cores in the production direction is already  
30 carried out in corrugated cardboard production. In addition to the preferred use of rotating knives, cutting with stationary knives is also conceivable. The connected corrugated core strips form a relatively stable web, and therefore the corrugated core web can  
35 be conveyed by using rolls or belts downstream of the longitudinal cutting knives, following the introduction of the slits.

Figure 19 shows a variable apparatus 24 for introducing the longitudinal slits. By means of uniform adjustment of the distances between the individual cutting knives  
5 20 in the width direction, honeycomb core layers of different thickness can be produced. In addition, the rapid replacement of the complete cutting rolls (for example using turret systems, as they are known) is also conceivable.

10

Figure 20 shows an apparatus for rotating and folding together the connected corrugated core strips. The apparatus may comprise simple stationary guides 23, rotating rolls or transport belts. The geometry of  
15 these guides determines how the connected corrugated core strips are rotated during transport and folded against one another. Thereby, either sequential rotation, in which the result is very slight step-like waviness over the width, or simultaneous rotation with  
20 a larger waviness over the width is possible.

Figure 21 shows a variable apparatus for the simultaneous rotation and folding together of the connected corrugated core strips with waviness over the  
25 width. Figure 17 shows how the guides of the individual material strips have to guide each third corrugated core strip in three stages as they are rotated. In the case of this variant, it is advantageous that it is sufficient to lead the respective non-rotating two  
30 corrugated core strips upwardly and downwardly, in order to rotate the respective corrugated core strip located between them through 90°.

This folded honeycomb made of corrugated cardboard, the  
35 process described and the apparatus permit the production of a honeycomb material which is significantly superior to the corrugated cardboard in

all material characteristics. The honeycomb core layer thickness should preferably be more than 4 mm, since the material savings as compared with corrugated cardboard with two corrugated cores lying one above another are particularly large. However, even with lower heights, the honeycomb provides considerably better material characteristics. The material can be produced from the same, even if lighter papers (kraft-liner or testliner) and the conventional adhesive based on starch or PVA with manufacturing equipment which, in terms of significant components, is equivalent to the widely developed corrugated cardboard manufacturing equipment. The two additional process steps (introduction of the longitudinal slits and folding the connected corrugated cardboard strips) can be carried out by the simple apparatus described and do not reduce the production speed.

Using the above-described adjustable longitudinal cutting and guidance devices and the exchange, common in the corrugated cardboard industry, of the rolls and components, a manufacturing equipment for single-flute corrugated cardboard is able to produce folded honeycombs of different thicknesses very flexibly. The production costs are expected to be lower than those in the production of two-layer corrugated cardboards. In addition, the production speed on a honeycomb cardboard production manufacturing equipment based on a single-flute corrugated cardboard manufacturing equipment will probably be greater than the double-flute corrugated cardboard manufacturing equipment which are common nowadays.

During the production of folded honeycombs from corrugated cardboard, the gluing of the covering layers can be carried out in the same production line, directly after the finishing of the core layer, and for

the further processing of the honeycomb cardboard, the cutting, punching and printing machines which are common in the corrugated cardboard processing industry can be used.

5

As compared with the corrugated cardboard, honeycomb cardboard has significantly better compressive strengths in the plane of the material (edge compression resistance, ECT), in particular in the production direction (machine direction). In addition, at right angles to the plane of the material (flat compression resistance, FCT), it provides significantly improved compressive characteristics and a greater absorption of shock energy. The possible savings in weight and material, the direction-independent strengths and the better surface quality, and also the small expenditure for the additional production steps, permit the expectation that the folded honeycomb cardboard made of corrugated cardboard is capable of competing with corrugated cardboard.

In addition, the folded honeycomb can be further processed in various ways to form sandwich components, without cover layers being laminated on. The honeycomb cells can additionally be filled with a foam or similar material for the purpose of improved acoustic and thermal insulation. Moreover, the honeycomb cell walls can be impregnated or coated by means of a dipping bath or by spraying. The good material characteristics and the low production costs permit the expectation that this material, in addition to packaging applications, will also find applications in other sectors, such as in inner cladding components for vehicles, in furniture, floor coverings and wall coverings, and so on.



The advantages of the folded honeycomb according to the invention are:

- 5 a) improved printability as a result of better surface quality,
- b) improved mechanical characteristics, for example flat compression resistance and edge compression resistance, bending strength, flexural rigidity,
- 10 c) low weight with the same mechanical characteristics,
- d) good impact resistance and mechanical characteristics after an impact or shock,
- e) environmental friendliness, for example 20 to 25%  
15 less raw materials are used and the folded honeycomb finds application where hitherto non-reusable materials have been used.

Patent Claims

1. A folded honeycomb, comprising a large number of  
corrugated core strips which lie beside one  
5 another and in one plane and each consist of a  
corrugated or trapezoidal core with at least one  
cover layer, the cover layers of the corrugated  
core strips being arranged parallel to one another  
and transversely with respect to the plane, and  
10 the longitudinal direction of the flutes of the  
corrugated core extending, for each corrugated  
core strip, transversely with respect to the  
latter, and the corrugated core strips being  
connected to one another, characterized in that  
15 for at least each second corrugated core strip, a  
cover layer of one corrugated core strip is formed  
in one piece with the cover layer of one of the  
adjacent corrugated core strips and is connected  
to the latter via a fold of  $180^\circ$ , and the  
20 connections between adjacent corrugated core  
strips are arranged alternately on one side and  
the other side of the folded honeycomb.
2. The folded honeycomb according to claim 1,  
25 characterized in that the ratio between the width  
and the height of each corrugated core strip lies  
in the range from 0.5 to 2.
3. The folded honeycomb according to claim 1 or 2,  
30 characterized in that the ratio between the  
weights per unit area of the corrugated core  
material and the cover layer material of each  
corrugated core strip lies in the range from 1 to  
2.
- 35 4. The folded honeycomb according to one of claims 1  
to 3, characterized in that the cover layer of the  
corrugated or trapezoidal core of at least each

second corrugated strip is wholly or partly connected over the entire area to the cover layer of the corrugated or trapezoidal core of at least one adjacent corrugated core strip.

5

5. The folded honeycomb according to one of the preceding claims, characterized in that each corrugated core strip consists of two cover layers and a corrugated or trapezoidal core arranged between them, and the one cover layer of each corrugated core strip is formed in one piece with a cover layer of an adjacent corrugated core strip and is connected to the latter via a fold of 180°, and the other cover layer is formed in one piece with a cover layer of another adjacent corrugated core strip and is connected to the latter via a fold of 180°.

10

15

20

25

30

35

6. The folded honeycomb according to one of the preceding claims, further characterized in that a cover layer is arranged at least on one side of the large number of corrugated core strips lying beside one another.

7. A process for the continuous production of a folded honeycomb, comprising the following steps:

a) forming connected corrugated core strips consisting of a corrugated or a trapezoidal core with at least one cover layer, the corrugated core strips being connected to one another and the connections between adjacent corrugated core strips being arranged alternately on one side and the other side of the folded honeycomb and, for at least each second corrugated core strip, the cover layer of one corrugated core strip being connected to the cover layer of an adjacent corrugated core strip; and

5 b) rotating the connected corrugated core strips through about  $90^\circ$  in relation to one another, as a result of which the cover layers of the corrugated core strips are folded through about  $180^\circ$  at the connecting lines.

10 8. The process according to claim 7, characterized in that the ratio between the width and the height of each corrugated core strip lies in the range from 0.5 to 2.

15 9. The process according to claim 7 or 8, characterized in that the ratio between the weights per unit area of the corrugated core material and the cover layer material of each corrugated core strip lies in the range from 1 to 2.

20 10. The process according to one of claims 7 to 9, characterized in that the touching surfaces are firmly connected to one another, either with adhesive which is applied previously or in another way.

25 11. The process according to one of claims 7 to 10, characterized in that at least one cover sheet is laminated onto the folded honeycomb.

30 12. The process according to one of claims 7 to 11, characterized in that the step of forming the connected corrugated core strips includes cutting completely through the corrugated core web to form individual corrugated core strips.

35 13. The process according to one of claims 7 to 11, characterized in that the step of forming the connected corrugated core strips includes the

longitudinal slitting of a corrugated core web to form connected corrugated core strips.

14. A system for producing a folded honeycomb,  
5 comprising:

10 a) a first apparatus for forming connected corrugated core strips lying in a plane consisting of a corrugated or a trapezoidal core with at least one cover layer, the corrugated core strips being connected to one another and the connections between adjacent corrugated core strips being arranged alternately on one side and the other side of the plane, in at least each second  
15 corrugated core strip a cover layer of one corrugated core strip being connected to the cover layer of one of the adjacent corrugated core strips; and

20 b) a second apparatus for rotating the connected corrugated core strips through about  $90^\circ$  with respect to one another, as a result of which the cover layers are folded through about  $180^\circ$  at the connecting lines.



25

15. The apparatus according to claim 14, characterized in that the apparatus for forming the connected corrugated core strips includes an apparatus for cutting completely through a corrugated core web to form individual corrugated core strips.  
30

16. The apparatus according to claim 14, characterized in that the apparatus for forming the connected corrugated core strips includes an apparatus for the longitudinal slitting of a corrugated core web to form connected corrugated core strips.  
35

17. The apparatus according to one of claims 14 to 16,  
characterized in that the ratio between the width  
and the height of each corrugated core strip lies  
in the range from 0.5 to 2.
- 5
18. The apparatus according to one of claims 14 to 17,  
characterized in that the ratio between the  
weights per unit area of the corrugated core  
material and the cover layer material of each  
10 corrugated core strip lies in the range from 1 to  
2.
19. The apparatus according to one of claims 16 to 18,  
characterized in that the apparatus for the  
15 longitudinal slitting of the corrugated core web  
has a plurality of rotating or stationary knives.
20. The apparatus according to one of claims 14 to 19,  
characterized in that the rotation apparatus has a  
20 longitudinal undulation and, as a result, leads  
the corrugated core strips out of the plane for  
some time or leads them in such a way that  
individual corrugated core strips or a plurality  
of corrugated core strips are rotated one after  
25 another.
21. The apparatus according to one of claims 14 to 20,  
characterized in that an apparatus for applying  
adhesive to the cover layers of the corrugated  
30 core strips is located upstream or in the region  
of the rotation of the corrugated core strips.
22. The apparatus according to one of claims 16 to 21,  
characterized in that the apparatus for cutting  
and for rotation in each case has adjusting  
35 devices for the variable setting of the distance  
of the knives and guide elements in the width  
direction.

23. A plurality of corrugated core strips which lie one beside the other, are connected to each other and lie in one plane and which each consist of a  
5 corrugated or a trapezoidal core with at least one cover layer, the cover layers of the corrugated core strips being parallel to one another and the longitudinal direction of the flutes of the corrugated core, for each corrugated core strip  
10 extending transversely with respect to the latter, and the corrugated core strips being connected to one another, characterized in that for at least each second corrugated core strip, the cover layer of one corrugated core strip is formed in one  
15 piece with the cover layer of one of the adjacent corrugated core strips and can be connected to the latter by being folded through  $180^\circ$  to form a folded honeycomb, so that the connections between adjacent corrugated core strips are arranged  
20 alternately on one side and the other side of the folded honeycomb.
24. The plurality according to claim 23, characterized  
25 in that the ratio between the width and the height of each corrugated core strip lies in the range from 0.5 to 2.

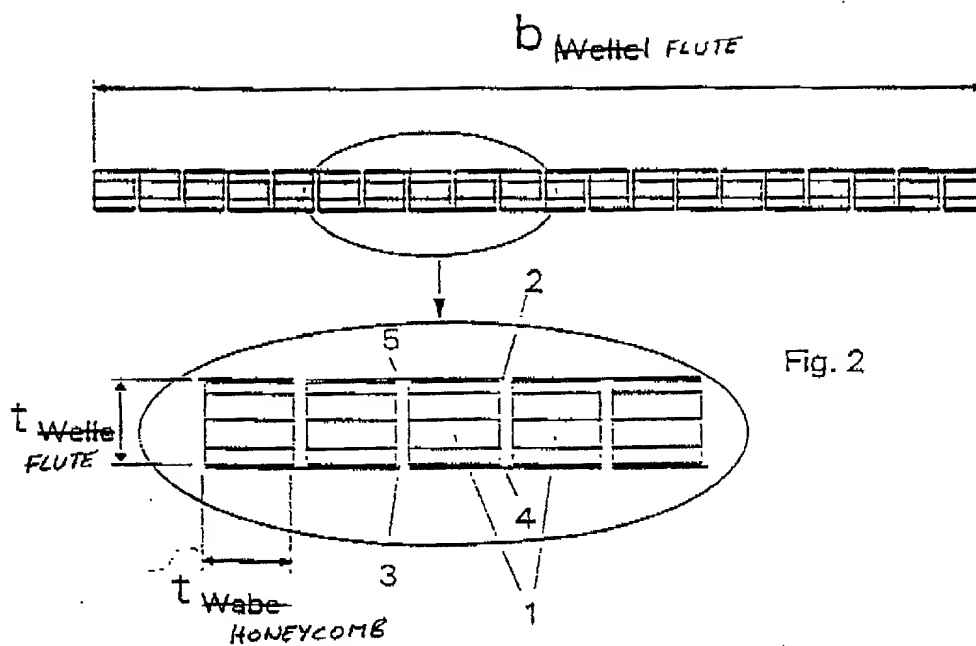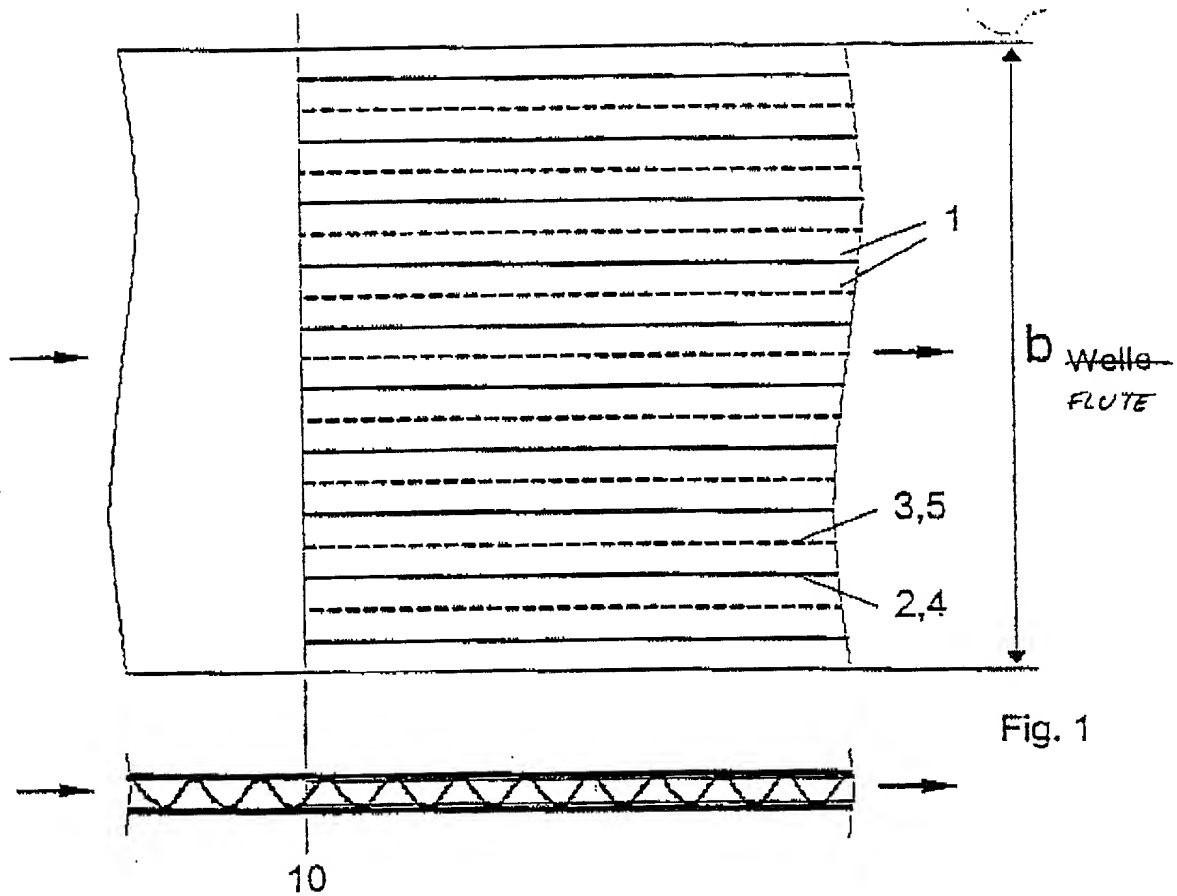



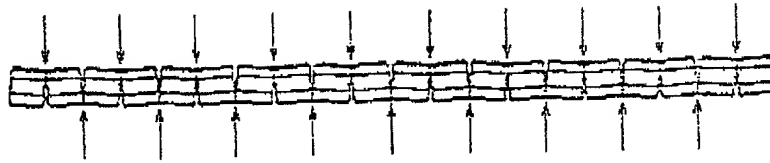


Fig. 3

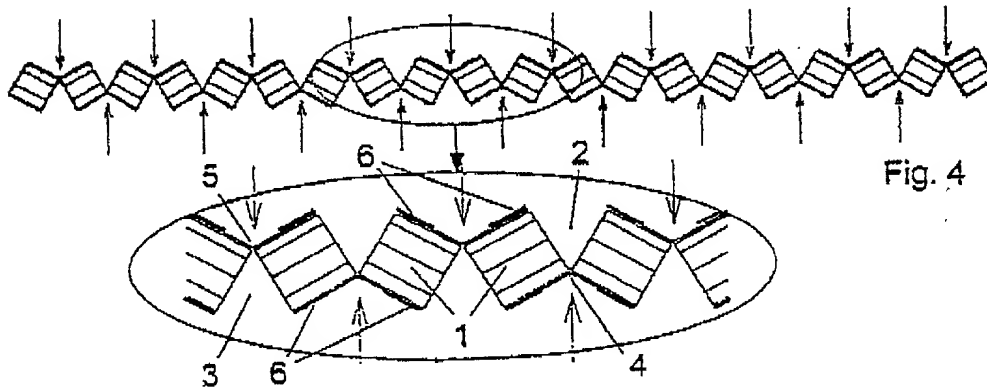


Fig. 4

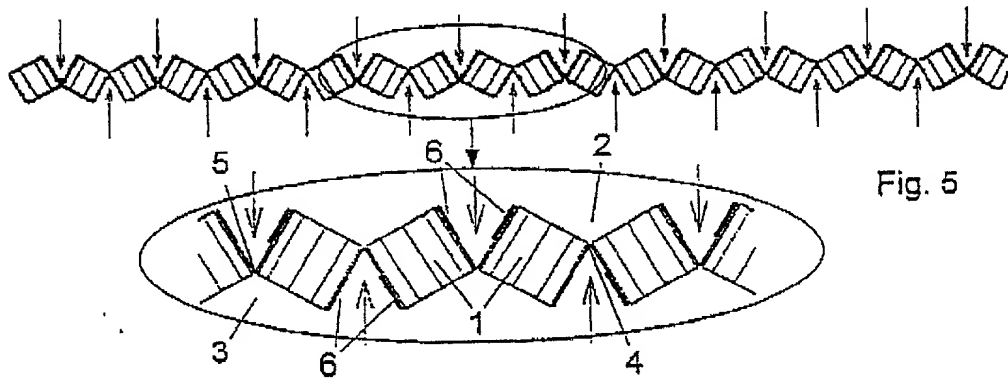


Fig. 5

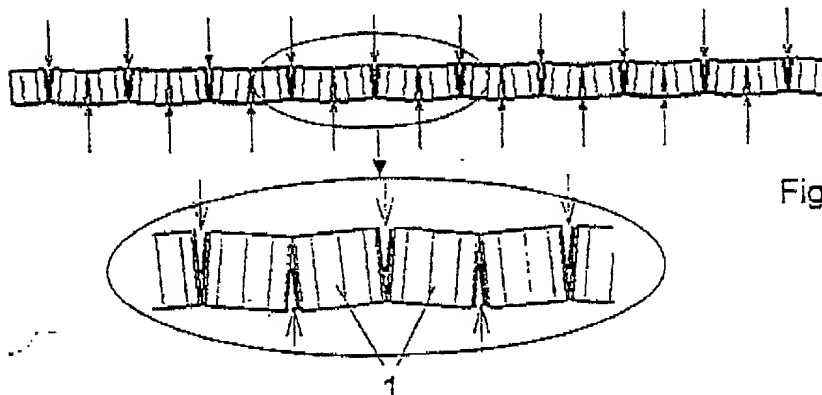


Fig. 6

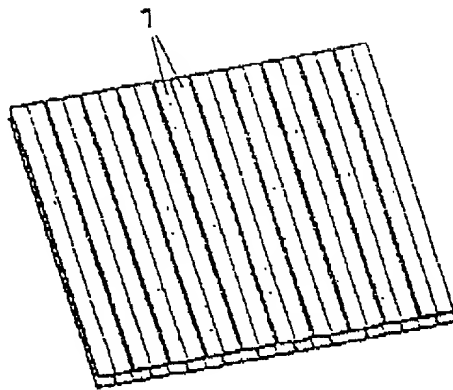


Fig. 7

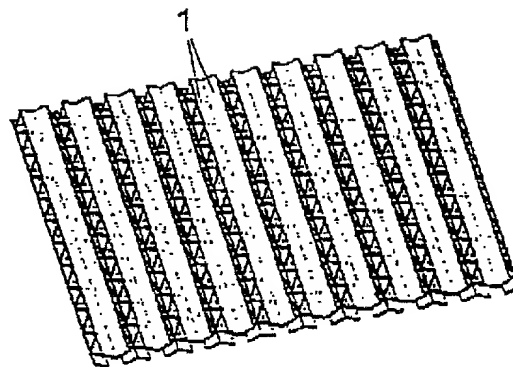


Fig. 8

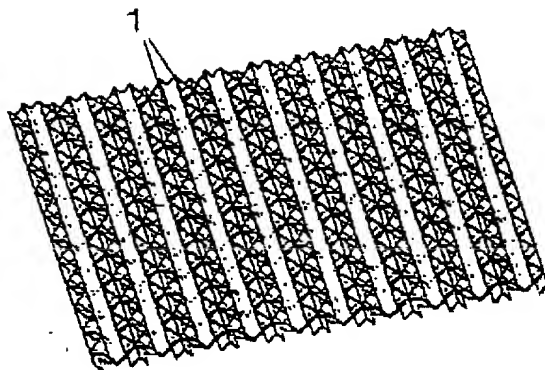


Fig. 9

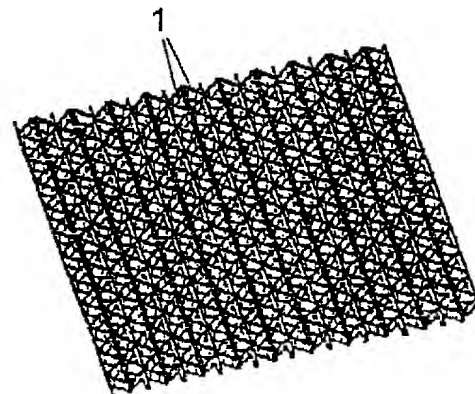


Fig. 10

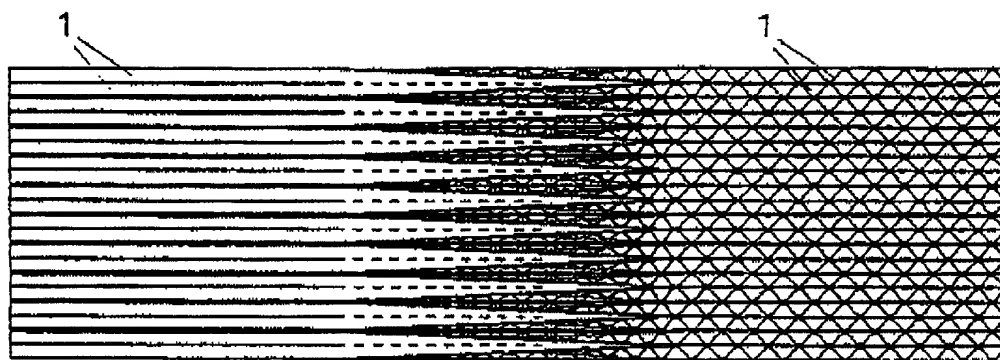


Fig. 11

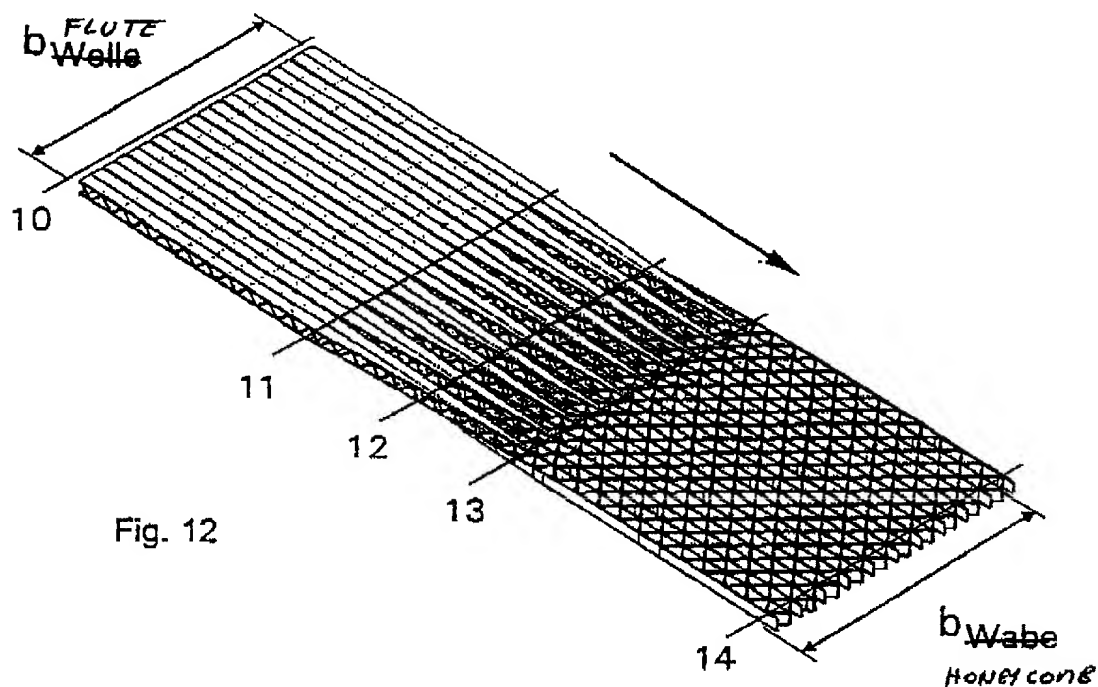


Fig. 12

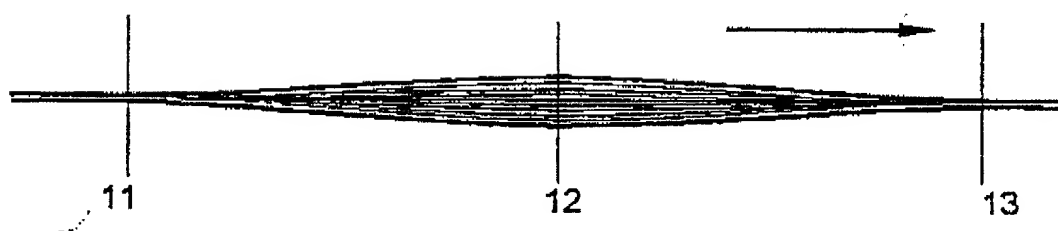


Fig. 13




Fig. 14

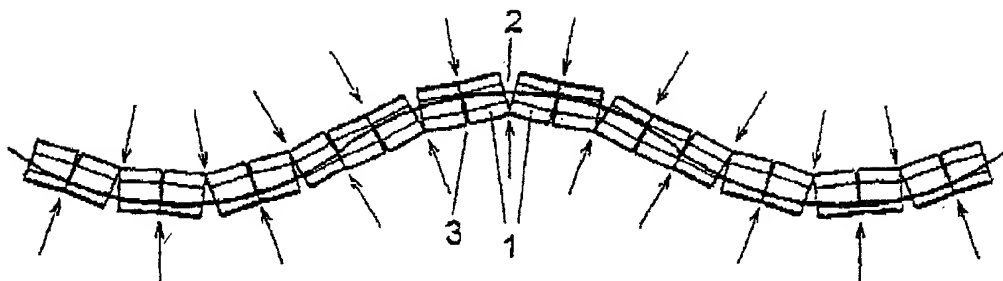


Fig. 15

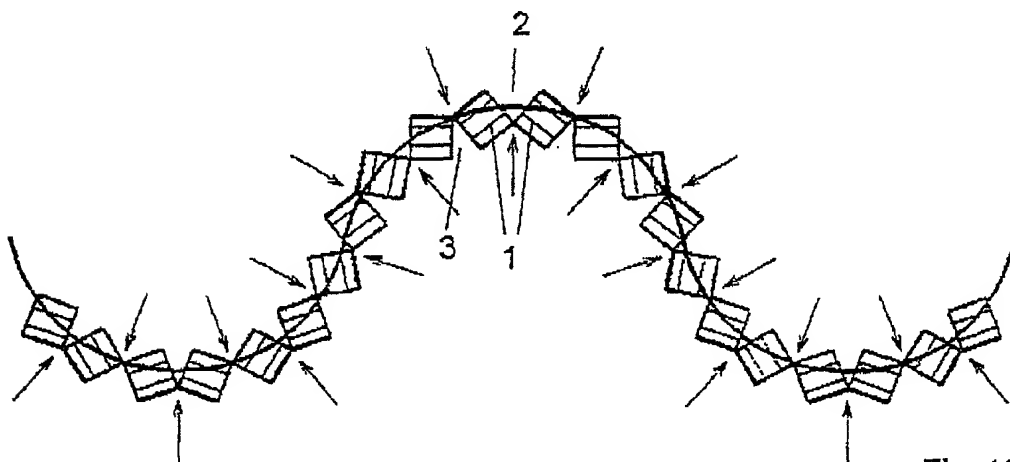


Fig. 16

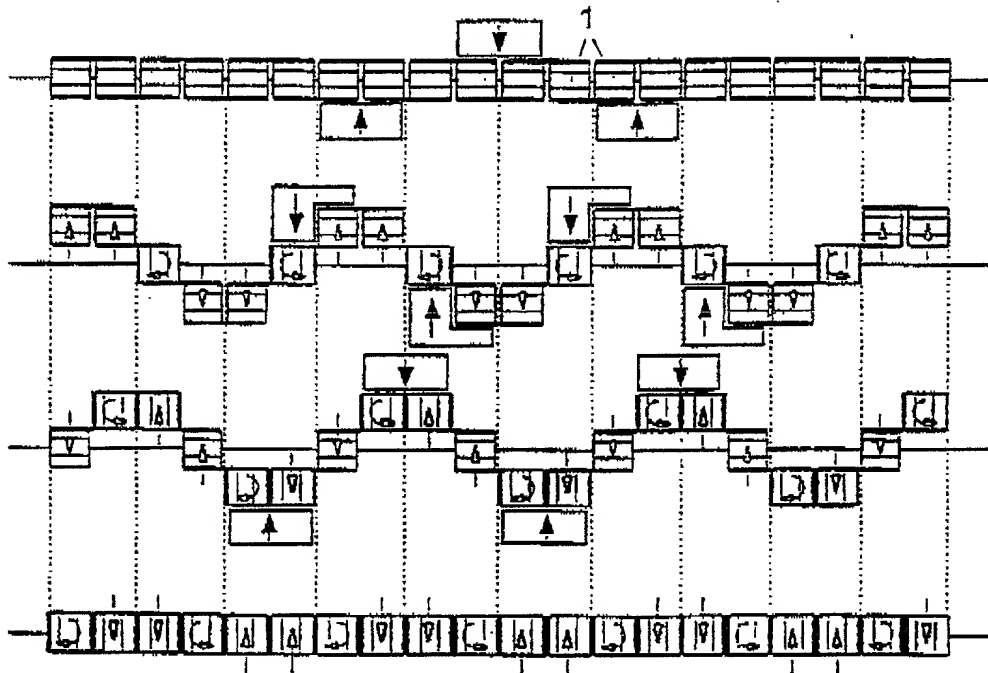


Fig. 17

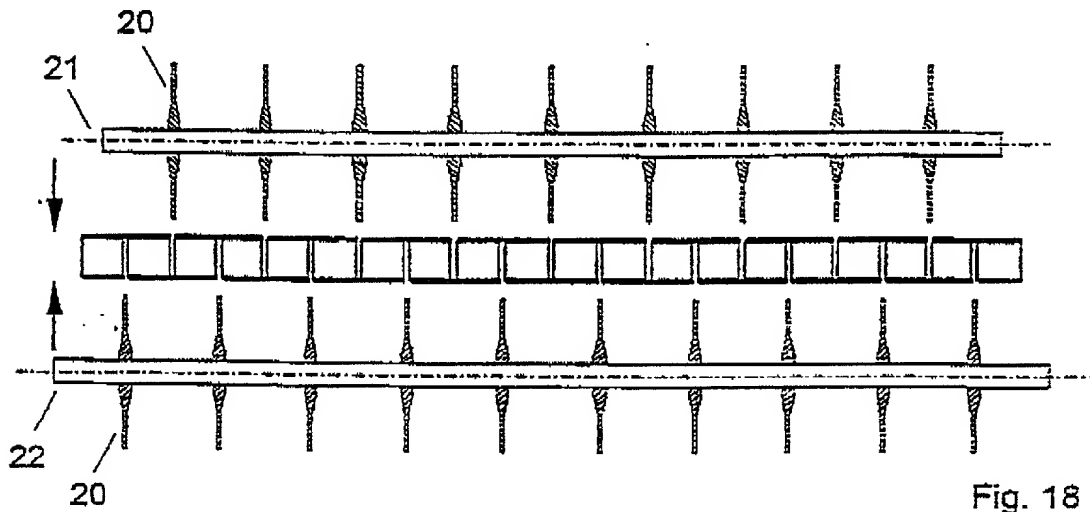


Fig. 18

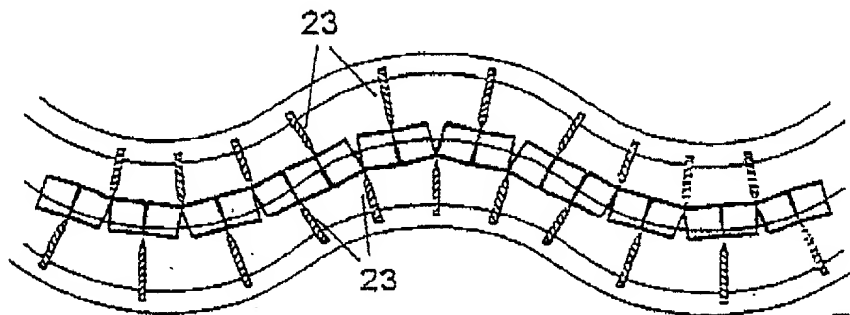


Fig. 20

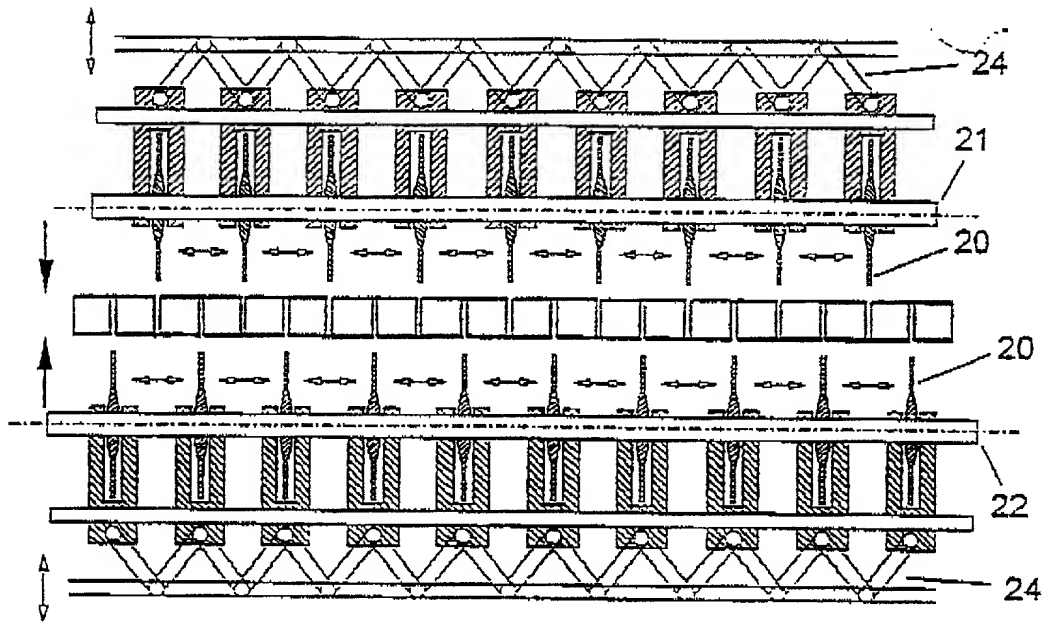


Fig. 19

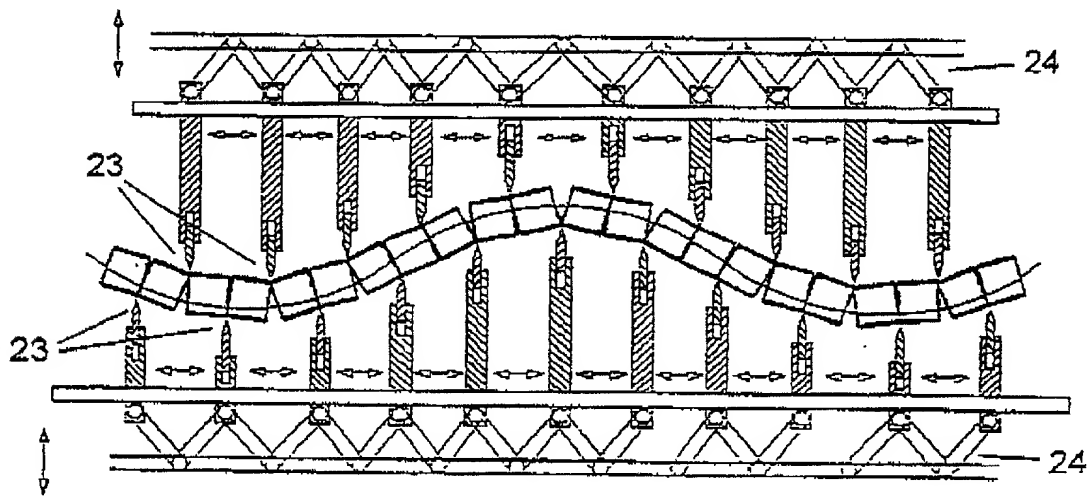


Fig. 21

**DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated

below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled FOLDED HONEYCOMB STRUCTURE CONSISTING OF CORRUGATED PAPERBOARD AND METHOD AND DEVICE FOR PRODUCING THE SAME, the specification of which:

— is attached hereto.

X was filed on 25 March 2000 as

Application Serial No. PCT/EP00/02646

and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

# **PRIOR FOREIGN APPLICATION(S)**

<u>Country</u>	<u>Number</u>	<u>Date Filed</u>	<u>Priority Claimed</u>	
			<u>Yes</u>	<u>No</u>
<u>Germany</u> ✓	<u>1 99 13 830.3</u>	<u>03/26/99</u> ✓	<u>X</u>	<u>—</u>
<u>                    </u>	<u>                    </u>	<u>                    </u>	<u>—</u>	<u>—</u>
<u>                    </u>	<u>                    </u>	<u>                    </u>	<u>—</u>	<u>—</u>

I hereby claim the benefit under Title 35, United States Code Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
<u>PCT/EP00/02646</u> ✓	<u>03/25/00</u> ✓	<u>Pending</u>
<u>                    </u>	<u>                    </u>	<u>                    </u>

And I hereby appoint Thomas E. Smith, Registration No. 18,243, Dennis M. McWilliams, Registration No. 25,195, James R. Sweeney, Registration No. 18,721, William M. Lee, Jr., Registration No. 26,935, Glenn W. Ohlson, Registration No. 28,455, David C. Brezina, Registration No. 34,128, Jeffrey R. Gray, Registration No. 33,391, Timothy J. Engling, Registration No. 39,970, Gregory B. Beggs, Registration No. 19,286, Gerald S. Geren, Registration No. 24,528, Peter J. Shakula, Registration No. 40,808, and Robert F.I. Conte, Registration No. 20,354 to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith. It



is requested that all communications be directed to Lee, Mann, Smith, McWilliams, Sweeney & Ohlson, P.O. Box 2786, Chicago, Illinois 60690-2786, telephone number (312) 368-1300.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00 Full name of sole or first inventor: JOCHEN PFLUG

Signature [Signature] Date 08.11.2001

Country of Residence: Germany

Country of Citizenship: Germany ✓

Post Office and Residence Address: Ernst-Göbel-Strasse 35  
D-65207 Wiesbaden  
Germany DEX

2-00 Full name of sole or first inventor: IGNACE VERPOEST

Signature [Signature] Date 8/09/2001

Country of Residence: Belgium

Country of Citizenship: Belgium

Post Office and Residence Address: Grensstraat 53/5  
B-3010 Kessel-Lon  
Belgium DEX